

60 Rec'd PCT/PTO 09 JAN 2001

FORM PTO-1390 (Modified)  
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

201013US0PCT

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/720257

INTERNATIONAL APPLICATION NO.  
PCT/EP99/04818

INTERNATIONAL FILING DATE  
08 July 1999

PRIORITY DATE CLAIMED  
09 July 1998

TITLE OF INVENTION

PROPOXYLATE-CONTAINING FUEL COMPOSITIONS

APPLICANT(S) FOR DO/EO/US

Wolfgang GUENTHER, et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ Certificate of Mailing by Express Mail
20. ☒ Other items or information:

Request for Consideration of Documents Cited in International Search Report

Notice of Priority

PCT/IB/304

PCT/IB/308

U.S. APPL

09/720257

INTERNATIONAL APPLICATION NO.

PCT/EP99/04818

ATTORNEY'S DOCKET NUMBER

201013US0PCT

21. The following fees are submitted:

CALCULATIONS PTO USE ONLY

**BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5) ) :**

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... \$1,000.00
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... \$860.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$710.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$690.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$100.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =****\$860.00**

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

**\$0.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	14 - 20 =	0	x \$18.00
Independent claims	2 - 3 =	0	x \$80.00

**\$0.00****\$0.00**Multiple Dependent Claims (check if applicable). ☐**\$0.00****TOTAL OF ABOVE CALCULATIONS =****\$860.00**

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐

**\$0.00****SUBTOTAL =****\$860.00**

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

**\$0.00****TOTAL NATIONAL FEE =****\$860.00**

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☐

**\$0.00****TOTAL FEES ENCLOSED =****\$860.00**

Amount to be: refunded	\$
charged	\$

☒ A check in the amount of **\$860.00** to cover the above fees is enclosed.

☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **15-0030** A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

OBLON, SPIVAK, McCLELLAND, MAIER &amp; NEUSTADT, P.C.

**22850**

**Surinder Sachar**  
**Registration No. 34,423**

SIGNATURE

Norman F. Oblon

NAME

**24,618**

REGISTRATION NUMBER

DATE

1-09-01

09/720257

201013US0 PCT

RECEIVED 09 JAN 2001

IN THE UNITED STATES PATENT & TRADEMARK OFFICE

IN RE APPLICATION OF:

:

WOLFGANG GUENTHER ET AL

: ATTN: APPLICATION DIVISION

SERIAL NO: NEW PCT APPLICATION  
(BASED ON PCT/EP99/04818)

:

FILED: HEREWITH

:

FOR: PROPOXYLATE-CONTAINING FUEL  
COMPOSITIONS

PRELIMINARY AMENDMENT

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

SIR:

Prior to examination on the merits, please amend the above-identified application as follows.

IN THE SPECIFICATION

Please amend the specification as follows:

Page 1, before line 2, delete the title of the invention in its entirety, and insert therefor:

- - FUEL COMPOSITIONS CONTAINING PROPOXYLATE - -.

IN THE CLAIMS

Please amend the claims as follows:

Claim 5, line 1, delete "or 4".

Claim 6, line 1, change "any of claims 3 to 5" to --claim 3--.

Claim 7, line 1, change "any of claims 4 to 6" to --claim 4--.

Claim 8, line 1, change "any of claims 4 to 7" to --claim 4--.

Claim 9, line 1, change "any of the preceding claims" to --claim 1--.

Claim 12, line 1, delete "or 11".


Claim 13, line 1, change "any of claims 10 to 12" to --claim 10--.

#### REMARKS

Claims 1-14 are active in the present application. The claims are amended to remove multiple dependencies. No new matter is added. An action on the merits and allowance of the claims is solicited.

Respectfully submitted,

OBLON, SPIVAK, McCLELLAND,  
MAIER & NEUSTADT, P.C.



Norman F. Oblon  
Attorney of Record  
Registration No. 24,618

Daniel J. Pereira, Ph.D.  
Registration No. 45,518

**Surinder Sachar**  
**Registration No. 34,423**



**22850**

(703) 413-3000  
Fax #: (703) 413-2220  
NFO/DJPER/js

I:\user\DJPER\201013US-PR.wpd



**PCT** WELTORGANISATION FÜR GEISTIGES EIGENTUM  
Internationales Büro  
INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE  
INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

<b>(51) Internationale Patentklassifikation <sup>7</sup> :</b> <p style="text-align: center; font-weight: bold;">C10L 1/18, 1/14, 10/00</p>	<b>A1</b>	<b>(11) Internationale Veröffentlichungsnummer:</b> <b>WO 00/02978</b>  <b>(43) Internationales Veröffentlichungsdatum:</b> 20. Januar 2000 (20.01.00)
<b>(21) Internationales Aktenzeichen:</b> PCT/EP99/04818  <b>(22) Internationales Anmeldedatum:</b> 8. Juli 1999 (08.07.99)  <b>(30) Prioritätsdaten:</b> 198 30 818.3      9. Juli 1998 (09.07.98)      DE  <b>(71) Anmelder (für alle Bestimmungsstaaten ausser US):</b> BASF AKTIENGESellschaft [DE/DE]; D-67056 Ludwigshafen (DE).  <b>(72) Erfinder; und</b> <b>(75) Erfinder/Anmelder (nur für US):</b> GÜNTHER, Wolfgang [DE/DE]; Hauptstrasse 9, D-67582 Mettenheim (DE). OPPENLÄNDER, Knut [DE/DE]; Otto-Dill-Strasse 23, D-67061 Ludwigshafen (DE). SCHWAHN, Harald [DE/DE]; Schlossstrasse 68, D-69168 Wiesloch (DE). TRÖTSCH-SCHALLER, Irene [DE/DE]; Rottwegshohl 11, D-67281 Bissersheim (DE).  <b>(74) Anwälte:</b> KINZEBACH, Werner usw.; Ludwigsplatz 4, D-67059 Ludwigshafen (DE).		<b>(81) Bestimmungsstaaten:</b> AL, AU, BG, BR, BY, CA, CN, CZ, EE, GE, HR, HU, ID, IL, IN, JP, KR, KZ, LT, LV, MK, MX, NO, NZ, PL, RO, RU, SG, SI, SK, TR, UA, US, ZA, eurasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Veröffentlicht</b> <i>Mit internationalem Recherchenbericht.          Vor Ablauf der für Änderungen der Ansprüche zugelassenen Frist; Veröffentlichung wird wiederholt falls Änderungen eintreffen.</i>
<b>(54) Title:</b> <u>FUEL COMPOSITIONS CONTAINING PROPOXILATE</u>  <b>(54) Bezeichnung:</b> PROPOXILAT ENTHALTENDE KRAFTSTOFFZUSAMMENSETZUNGEN		
$\text{R}^1 - \left[ \text{O} - \text{CH}_2 - \underset{\text{CH}_3}{\text{CH}} \right]_n - \text{OH} \quad (I)$		
<b>(57) Abstract</b>  <p>The invention relates to fuel compositions for internal combustion engines comprising a main quantity of a liquid hydrocarbon fuel and a pure portion of at least one propoxilate additive of formula (I), wherein n is an integer ranging from 10 to 20, and R<sup>1</sup> represents a straight-chain or branched C<sub>8</sub>-C<sub>18</sub> alkyl radical or C<sub>8</sub>-C<sub>18</sub> alkenyl radical; optionally in combination with at least one detergent additive such as, for example, a polyalkylamine of formula (II) R<sup>2</sup>-NH<sub>2</sub>, wherein R<sup>2</sup> represents a straight-chain or branched polyalkyl radical having a numerical average molecular weight ranging from approximately 500 to approximately 5000. The invention also relates to fuel additive compositions which contain propoxilates of formula (I) and optionally contain additional additives such as said polyalkylamines of formula (II) used as intake valve cleaners.</p>		
<b>(57) Zusammenfassung</b>  <p>Die Erfindung betrifft Kraftstoffzusammensetzungen für Verbrennungsmotoren, umfassend eine Hauptmenge eines flüssigen Kohlenwasserstoffkraftstoffs und einen reinigenden Anteil wenigstens eines Propoxilat-Additivs der Formel (I), worin n für einen ganzzahligen Wert von 10 bis 20 steht und R<sup>1</sup> für einen geradkettigen oder verzweigten C<sub>8</sub>-C<sub>18</sub>-Alkyl- oder C<sub>8</sub>-C<sub>18</sub>-Alkenylrest steht; gegebenenfalls in Kombination mit wenigstens einem Detergensadditiv, wie z.B. einem Polyalkylamin-Additiv der Formel R<sup>2</sup>-NH<sub>2</sub> (II), worin R<sup>2</sup> für einen geradkettigen oder verzweigten Polyalkylrest mit einem zahlenmittleren Molekulargewicht von etwa 500 bis etwa 5000 steht; sowie Kraftstoffadditivzusammensetzungen, welche Propoxilate der Formel (I) und gegebenenfalls weitere Additive, wie obige Polyalkylamine der Formel (II) als Einlassventilreiniger enthalten.</p>		

# Propoxylate-containing fuel compositions

The present invention relates to novel propoxylate-containing  
5 fuel compositions and novel additive concentrates.

Carburetors and intake systems of gasoline engines as well as  
injection systems for fuel metering in gasoline and diesel  
engines are increasingly being contaminated by impurities. The  
10 impurities arise from dust particles from the air taken in by the  
engine, unburnt hydrocarbon residues from the combustion chamber  
and the vent gases from the crank case which are passed into the  
carburetor.

15 These residues shift the air/fuel ratio during idling and in the  
lower part-load range so that the mixture becomes richer and  
combustion less complete. As a result of this, the proportion of  
uncombusted or partially combusted hydrocarbons in the exhaust  
gas increases and the gasoline consumption rises.

20 It is known that these disadvantages are avoided by using fuel  
additives for keeping valves and carburetor or injection systems  
clean (cf. for example: M. Rossenbeck in Katalysatoren, Tenside,  
Mineralöladadditive, editors J. Falbe, U. Hasserodt, page 223,  
25 G. Thieme Verlag, Stuttgart 1978). A distinction is now made  
between two generations, depending on the mode of action and  
preferred place of action of such detergent additives. The first  
generation of additives could only prevent the formation of  
deposits in the intake system but could not remove existing  
30 deposits. On the other hand, the additives of the second  
generation can prevent and eliminate deposits (keep-clean and  
clean-up effect). This is permitted in particular by their  
excellent heat stability in zones of high temperature, in  
particular at the intake valves.

35 The molecular structural principle of these additives of the  
second generation which act as detergents is based on the linking  
of polar structures with generally higher molecular weight  
nonpolar or oleophilic radicals.

40 Typical members of the second generation of additives are  
products based on polyisobutene in the nonpolar molecular moiety,  
in particular additives of the polyisobutylamine type. Such  
detergents can be prepared by two different multistage synthesis  
45 processes, starting from polyisobutenes: the first process takes  
place via chlorination of the polymeric parent structure,  
followed by nucleophilic substitution of the polymeric parent

structure by amines or preferably ammonia. The disadvantage of this process is the use of chlorine, which results in the occurrence of chlorine- or chloride-containing products, which is now by no means desirable. In the second process, the polyiso-  
5 butylamines are prepared starting from polyisobutene, by hydroformylation and subsequent reductive amination according to EP-A-0 244 616.

Detergent additives, which may originate from a large number of  
10 chemical classes of substances, are used in general in combination with a carrier oil. The carrier oils have an additional "washing function", often support and promote the detergents in their action and can help to reduce the required amount of detergent. Specific detergents do not display their  
15 action at all until they are combined with a carrier liquid. Usually, viscous, high-boiling and in particular heat-stable liquids are used as carrier oils. They coat the hot metal surface (for example the intake valve) with a thin liquid film and thus prevent or delay to a certain degree the formation or deposition  
20 of decomposition products on the metal surfaces, but without being able to replace the detergent additive components.

Suitable carrier oils for the fuels for internal combustion engines are, for example, high-boiling refined mineral oil  
25 fractions, as well as synthetic liquids. Suitable mineral carrier oils are, for example, fractions obtained in mineral oil processing.

Examples of suitable synthetic carrier oils are polyolefins,  
30 (poly)esters, (poly)alkoxylates, and in particular aliphatic polyethers, aliphatic polyetheramines, alkylphenol-initiated polyethers and alkylphenol-initiated polyetheramines.

Adducts of butylene oxide with alcohols have excellent solubility  
35 in fuels but are comparatively expensive products and the starting material butylene oxide has to be prepared by a relatively expensive procedure.

More economical carrier oils can be made available in the form of  
40 adducts of propylene oxide with alcohols.


EP-A-0 704 519 describes propoxylates as carrier oil components in combination with a high molecular weight amine and a hydrocarbon polymer.  
45

EP-A-0 374 461 describes such propoxylates for use as a carrier oil in combination with esters of mono- or polycarboxylic acids and alcohols or polyols and amino- or amido-containing detergents. EP-A-0 374 461 expressly states (cf. page 4, line 29 et seq.) that the sole use of the propoxylates described therein reduces the intake valve deposits only to an insufficient extent, namely to values of from 80 to 220 mg per valve.

However, the known additive systems of the prior art which contain carrier oils based on propylene oxide still do not have the optimum cleaning effect in the engine. Furthermore, such adducts of propylene oxide with alcohols often give rise to problems owing to their limited solubility in fuels and owing to their poor compatibility with other additives, so that separation may occur. This effect is displayed in a particularly dramatic way when additive concentrates - additive systems are usually marketed as such - are to be formulated.

It is an object of the present invention to provide novel fuel compositions having improved properties for internal combustion engines. In particular, the novel fuel compositions should lead to substantially reduced intake valve deposits.

We have found, surprisingly, that this object is achieved by the provision of a fuel composition for internal combustion engines, comprising a principle amount of a liquid hydrocarbon fuel and an amount, which has a cleaning effect, in particular reduces intake valve deposits, of at least one propoxylate additive of the formula I

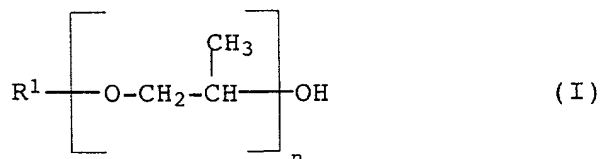

where

$n$  is an integer from 10 to 20 and

$\text{R}^1$  is straight-chain or branched  $\text{C}_8$ - $\text{C}_{18}$ -alkyl or  $\text{C}_8$ - $\text{C}_{18}$ -alkenyl, preferably  $\text{C}_8$ - $\text{C}_{18}$ -alkyl.

The novel fuel compositions have the surprising advantage that they reduce deposits in the region of the intake valves substantially better than the corresponding shorter-chain or



longer-chain propoxylates. This is surprising in particular because it has been assumed to date that compounds of the type used are suitable only as carrier oils for fuel compositions but carrier oils per se do not have a satisfactory cleaning effect in the intake system.

To achieve the effect shown according to the invention, the propoxylates of the above formula I should be used in an amount of from about 50 to 5000, preferably from about 100 to 2500, in particular from about 300 to 1000, mg/kg of fuel.

The above object according to the invention is furthermore achieved by providing fuel compositions for internal combustion engines which contain a principle amount of a liquid hydrocarbon fuel and an amount, which has a cleaning effect and substantially reduces impurities in the intake system, of an additive combination comprising:

- i) at least one propoxylate additive, preferably an alkanol propoxylate, of the above formula I and
- ii) at least one detergent additive.

The novel fuel compositions which contain the abovementioned additive combination also surprisingly substantially reduce intake valve deposits.

Examples of suitable detergent additives ii) are those that show a detergent effect or are anti valve seat recession additives, especially those with at least one hydrophobic hydrocarbon group and a number average molecular weight ( $M_N$ ) of 85 to 20,000 and at least one polar, preferably terminal grouping selected from

- (a) mono- or polyamino groups with up to 6 nitrogen atoms, at least one of which has basic properties,
- (b) nitro groups, if required in combination with hydroxyl groups,
- (c) hydroxyl groups in combination with mono- or polyamino groups, wherein at least one nitrogen atom has basic properties,
- (d) carboxyl groups or the alkali metal or alkaline earth metal salts thereof,

## 5

- (e) sulfonic groups or the alkali metal or alkaline earth metal salts thereof,
- 5 (f) polyoxy-C<sub>2</sub>-C<sub>4</sub>-alkylene groupings with hydroxyl groups, mono- or polyamino groups, wherein at least one nitrogen atom has basic properties, or carbamate groups in terminal position,
- (g) carboxylic acid ester groups,
- 10 (h) groupings with hydroxy and/or amino and/or amido and/or imido groups derived from succinic anhydride, and
- 15 (i) groupings prepared by means of Mannich reaction of substituted phenols with aldehydes and mono- or polyamines.

The hydrophobic hydrocarbon group preferably has a number average molecular weight ( $M_N$ ) of 113 to 10,000, especially of 300 to 20 5,000. Typical hydrophobic hydrocarbon groups, especially in combination with the polar groupings (a), (c), (h) and (i), are the polypropenyl, polybutenyl and polyisobutenyl residues with  $M_N$  of 300 to 5000, especially 500 to 2500 and in particular 750 to 2250.

- 25 Examples of additives containing mono- or polyamino groups (a) are preferably polyalkenmono- or polyalkenpolyamines based upon polypropene or highly reactive (i. e. with mostly terminal double bonds, especially in the  $\alpha$  or  $\beta$  positions) or conventional (i. e. with mostly central double bonds) polybutene or polyisobutene 30 with  $M_N$  of 300 to 5000. Such additives on the basis of highly reactive polyisobutene, which may be produced from polyisobutene which may contain up to 20 % by weight of n-butene units by means of hydroformylation and reductive amination with ammonia,
- 35 monoamines or polyamines, such as dimethylaminopropyl amine, ethylenediamine, diethylenetriamine, triethylenetetramine or tetraethylenepentamine, are especially known from EP-A-0 244 616. If polybutene or polyisobutene with mostly central double bonds (mainly in  $\beta$  or  $\gamma$  positions) are used in the production of the 40 additives, the preferred method of production is that of chlorination followed by amination or by oxidizing with air or ozone to yield carbonyl or carboxyl compounds and subsequent amination under reductive (hydrogenating) conditions. The amines used for amination may be the same as those mentioned above for 45 the reductive amination of the hydroformylated highly reactive

polyisobutene. WO 94/24231 especially describes corresponding additives on the basis of polypropene.

Preferred examples of amine additives of this type are polyalkyl  
5 amines of formula II



where

10

$R^2$  is a straight-chain or branched polyalkyl radical having a number average molecular weight of from about 500 to 5000.

15 Further preferred additives containing monoamino groups (a) are the hydrogenation products of the reaction products of polyisobutenes with an average degree of polymerization P of 5 to 100 with nitric oxides or mixtures of nitric oxides and oxygen as particularly described in WO-A-97/03946.

20

Further preferred additives containing monoamino groups (a) are the compounds obtainable from polyisobutenepoxides by reacting these with amines and subsequent dehydrogenation and reduction of the amino alcohols, as particularly described in DE-A 196 20 262.

25

Additives containing nitro groups, if required in combination with hydroxyl groups, (b) are preferably the reaction products of polyisobutenes with an average degree of polymerization P of 5 to 100 or 10 to 100 with nitric oxides or mixtures of nitric oxides

30

and oxygen, as particularly described in WO-A-96/03367 and WO-A-96/03479. These reaction products are in general mixtures of pure nitropolyisobutanes (e.g.  $\alpha,\beta$ -dinitropolyisobutane) and mixed hydroxynitropolyisobutanes (e.g.  $\alpha$ -nitro- $\beta$ -hydroxypolyisobutane).

35 Additives containing hydroxyl groups in combination with mono- or polyamino groups in particular are the reaction products of polyisobutene epoxides, which preferably may be obtained from polyisobutene with  $M_N = 300$  to 5000 and having mostly terminal double bonds, with ammonia, mono- or polyamines, as particularly  
40 described in EP-A-0 476 485.

Additives containing carboxyl groups and the alkali metal or alkaline earth metal salts thereof (d) are preferably copolymers of  $C_2$ - $C_{40}$  olefins with maleic anhydride with a total mole mass of  
45 500 to 20,000, whose carboxyl groups are wholly or partly reacted to yield the alkali metal or alkaline earth metal salts and a remaining part of the carboxyl groups is reacted with alcohols or

amines. Such additives are particularly known from EP-A-0 307 815. Such additives are mainly known as anti valve seat recession additives and may be used advantageously in combination with conventional fuel detergents, such as poly(iso)butenamines or  
 5 polyetheramines, as described in WO-A-87/01126.

Additives containing sulfonic groups or the alkali metal or alkaline earth metall salts thereof (e) are preferably alkali metall or alkaline earth metall salts of a sulfosuccinic acid  
 10 alkyl ester, as particularly described in EP-A-0 639 632. Such additives are mainly known as anti valve seat recession additives and may be used advantageously in combination with conventional fuel detergents, such as poly(iso)butenamines or polyetheramines.

15 Additives containing polyoxy-C<sub>2</sub>-C<sub>4</sub>-alkylene groupings (f) are preferably polyethers or polyetheramines which are obtainable by reacting C<sub>2</sub>-C<sub>60</sub>-alkanols, C<sub>6</sub>-C<sub>30</sub>-alkane diols, mono- or di-C<sub>2</sub>-C<sub>30</sub>-alkyl amines, C<sub>1</sub>-C<sub>30</sub>-alkyl cyclohexanols or C<sub>1</sub>-C<sub>30</sub>-alkyl phenols with 1 to 30 moles of ethylene oxide and/or propylene  
 20 oxide and/or butylene oxide per hydroxyl group or amino group and, in the case of polyetheramines, followed by reductive amination with ammonia, monoamines or polyamines. Such products in particular are described in EP-A-0 310 875, EP-A-0 356 725, EP-A-0 700 985 and US-A-4,877,416. In the case of polyethers such  
 25 products also fulfill the properties of carrier oils. Typical examples thereof are tridecanol- or isotridecanol butoxylates, isononylphenol butoxylates as well as polyisobutenol butoxylates and propoxylates as well as the corresponding reaction products with ammonia.

30 Additives containing carboxylic acid ester groups (g) are preferably esters of mono-, di- or tricarboxylic acids with long-chain alkanols or polyols, especially those with a minimum viscosity of 2 mm<sup>2</sup>/s at 100 °C, as they are described in  
 35 particular in DE-A-38 38 918. Aliphatic or aromatic acids may be used as mono-, di- or tricarboxylic acids and suitable ester alcohols and polyols are in particular long-chain representatives with, for example, 6 to 24 carbon atoms. Typical esters are the adipates, phthalates, isophthalates, terephthalates and  
 40 trimellitates of isooctanol, isononanol, isodecanol and isotridecanol. Such products also fulfill the properties of carrier oils.

Additives containing groupings derived from succinic anhydride  
 45 with hydroxy and/or amino and/or amido and/or imido groups (h) are preferably corresponding derivatives of polyisobutenyl succinic anhydride, which are obtainable by reacting conventional

or highly reactive polyisobutene with  $M_N = 300$  to 5000 with maleic acid anhydride either thermally or via chlorinated polyisobutene. In this respect, derivatives with aliphatic polyamines, like ethylenediamine, diethylenetriamine, triethylenetetramine or  
 5 tetraethylenepentamine, are particularly interesting. In particular, such motor fuel additives are described in US-A-4,849,572.

- Additives containing groupings produced by Mannich reaction of  
 10 substituted phenols with aldehydes and mono- or polyamines (i) are preferably reaction products of polyisobutene-substituted phenols with formaldehyde and mono- or polyamines, like ethylene diamine, diethylene triamine, triethylene tetraamine, tetraethylene pentamine or dimethylaminopropyl amine. The  
 15 polyisobutenyl-substituted phenols may be derived from conventional or highly reactive polyisobutene with  $M_N = 300$  to 5000. In particular, such "polyisobutene Mannich bases" are described in EP-A-0 831 141.
- 20 For an exact definition of the individually listed additives, explicit reference is made to the specifications of the above mentioned prior art literature.

- In the fuel compositions according to the second embodiment  
 25 described above, the additives i) and the additives ii), as for example of the formula II, together are present in a total amount of from about 100 to 10,000, preferably from about 300 to 5000, in particular from about 500 to 3000, mg/kg of fuel. The additives i) and ii) and especially those of the formula I and  
 30 those of the formula II are present in a molar ratio of from about 1:10 to 10:1, for example from about 1:5 to about 5:1, in particular from about 1:2 to 2:1.

- Suitable  $C_8$ - $C_{18}$ -alkyl radicals in the additives of formula I  
 35 according to the invention are straight-chain or branched, saturated carbon chains of 8 to 18 carbon atoms. For example, the following radicals may be mentioned: n-hexyl, 1-, 2- or 3-methylpentyl, straight-chain heptyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl,  
 40 heptadecyl and octadecyl and the singly or multiply branched analogs thereof. Preferred long-chain radicals are branched or straight-chain  $C_{10}$ - $C_{16}$ -alkyl, in particular  $C_{12}$ - $C_{14}$ -alkyl. Tridecyl radicals are especially preferred.

- 45 Suitable  $C_8$ - $C_{18}$ -alkenyl radicals in the additives of formula I according to the invention are straight-chain or branched carbon chains having at least one carbon-carbon double bond and 8 to 18

carbon atoms. Examples of monounsaturated C<sub>8</sub>-C<sub>18</sub>-alkenyl radicals are radicals such as straight-chain octenyl, nonenyl, decenyl, undecenyl, dodecenyl, tridecenyl, pentadecenyl, hexadecenyl, heptadecenyl and octadecenyl and the branched analogs thereof, it  
 5 being possible for the double bond to occur in any desired position. Also included according to the invention are both the cis- and the trans-isomers of the above C<sub>8</sub>-C<sub>18</sub>-alkenyl radicals. Preferred monounsaturated long-chain radicals are the C<sub>10</sub>-C<sub>16</sub>-alkenyl radicals.

10


Suitable polyalkyl radicals in additives of formula II according to the invention are preferably obtainable by homo- or copolymerization of the straight-chain or branched C<sub>2</sub>-C<sub>30</sub>-alkenes, C<sub>2</sub>-C<sub>6</sub>-alkenes and in particular C<sub>2</sub>-C<sub>4</sub>-alkenes being preferred.

15 Particularly preferred C<sub>2</sub>-C<sub>4</sub>-alkenes are 1-alkenes, such as propylene, 1-butene and isobutene. The number average molecular weight of such polyalkyl radicals is roughly in the range from 500 to 5000, preferably from about 800 to 1500, in particular about 1000. For example, the polyalkyl radical may be derived  
 20 from a copolymer of 1-butene and isobutene, and, for example, have a number average molecular weight of from about 800 to about 1500.

Propoxylates of the formula I which are particularly preferred  
 25 according to the invention are compounds in which R<sup>1</sup> is straight-chain or branched alkyl of 10 to 16 carbon atoms, or mixtures thereof. Particularly preferred propoxylates of the formula I are those in which the radical R<sup>1</sup> is alkyl of 12 to 14 carbon atoms or is a mixture of such alkyl radicals. A propoxylate of the formula  
 30 I in which the radical R<sup>1</sup> has 13 carbon atoms is particularly preferred.

A further group of propoxylates preferred according to the invention comprises those composed of from 12 to 18 repeating  
 35 units, in particular from 14 to 17 and especially from 14 to 16 repeating units, of the formula

40



45

The most preferred class of propoxylates comprises those having 15 repeating propoxylate units. It must be borne in mind that the above numerical data for n may also be average values since many of the known preparation methods for such adducts of alkylene  
5 oxides with alcohols usually lead to a product mixture with varying molecular weight distribution.

Alkoxyates of the formula I which are most preferred according to the invention are adducts of from 14 to 16, in particular 15,  
10 propylene oxide units of the above formula with a branched C<sub>13</sub>-alcohol, in particular C<sub>13</sub>-monoalcohol. Branched C<sub>13</sub>-alcohols which may be used according to the invention are, for example, also obtainable by oligomerization of C<sub>2</sub>-C<sub>6</sub>-olefins, in particular C<sub>3</sub>- or C<sub>4</sub>-olefins, and subsequent hydroformylation. A reaction  
15 mixture which may be obtained thereby and which may comprise, for example, different alcohol isomers can be used directly for the preparation of the additive components used according to the invention. However, prior separation of the reaction mixture can, if required, also be carried out.

20 The preferred alkanol propoxylates according to the invention are prepared in the conventional manner by reacting an alcohol, as an initiator molecule, with propylene oxide in the presence of an alkali, e.g. sodium hydroxide solution, potassium hydroxide  
25 solution, sodium methylate, potassium methylate or another alkali metal alkoxide, at from about 120 to 160°C, preferably from about 130 to 160°C, to give the desired adducts. After alkoxylation is complete, the propoxylate is freed from the catalyst, for example by treatment with magnesium silicate. The preparation is thus  
30 carried out analogously to the phenol-initiated alkoxyates described in DE-A-41 42 241.

The polyalkylamines of the formula II are compounds known per se and can be prepared by hydroformylation of reactive polyalkenes  
35 and subsequent reductive amination of the oxo product. The reactive polyalkenes having an average molecular weight of from about 500 to 5000, are homo- or copolymers of straight-chain or branched C<sub>2</sub>-C<sub>30</sub>-alkenes, preferably C<sub>2</sub>-C<sub>6</sub>-alkenes, in particular C<sub>2</sub>-C<sub>4</sub>-alkenes. Reactive polyalkenes comprise unsaturated polymers  
40 of high chemical homogeneity, more than 10% of the double bonds being in the alpha position. One possibility for the preparation of reactive polyalkenes is disclosed in DE-A-27 02 604. Particularly preferred reactive polyalkenes are those which are prepared from 1-alkenes, in particular propylene, 1-butene,  
45 isobutene or mixtures thereof.

Suitable polyalkylamines of the formula II are also amines according to EP-A-0 244 616 and EP-A-0 695 338, the content of which is hereby expressly incorporated by reference.

EP-A-0 244 616 describes in particular those polyalkylamines in which  $R^2$  is derived from isobutene and up to 20% by weight of n-butene. EP-A-0 695 338 describes in particular those polyalkylamines in which  $R^2$  is derived from one or more 1-n-alkenes of 3 - 6 carbon atoms and up to 50% by weight of ethene.

- 10 Novel fuel compositions comprise both diesel fuels and fuels for gasoline engines. Suitable fuels for gasoline engines are leaded and in particular unleaded regular and premium grade gasoline. The gasolines may also contain components other than hydrocarbons, for example alcohols, such as methanol, ethanol and tert-butanol, and ethers, e.g. methyl tert-butyl ether. In addition to the additives of the above formula I and, if required, II, the novel fuel compositions may contain further additive components.
- 20 Further additives which may be used according to the invention are described, for example, in European Patent Applications EP-A-0 277 345, 0 356 725, 0 476 485, 0 484 736, 0 539 821, 0 543 225, 0 548 617, 0 561 214, 0 567 810 and 0 568 873; in German Patent Applications DE-A-39 42 860, 43 09 074, 43 09 271, 43 13 088, 44 12 489, 44 25 834, 195 25 938, 196 06 845, 196 06 846, 196 15 404, 196 06 844, 196 16 569, 196 18 270 and 196 14 349; and in WO-A-96/03479.

Particularly useful liquid detergent additives are sold by BASF

- 30 AG, Ludwigshafen, under the tradename Kerocom® PIBA. These contain polyisobutenamines dissolved in aliphatic  $C_{10-14}$ -hydrocarbons.

In addition to the above additives, further conventional fuel additives may be present, for example corrosion inhibitors, demulsifiers, stabilizers, antioxidants, antistats, metallocenes, like ferrocene or methylcyclopentadienylmanganesetricarbonyl, lubricity additives, and dyes (markers).

- 40 Corrosion inhibitors are generally ammonium salts of organic carboxylic acids which, by virtue of the starting compound having the appropriate structure, tend to form films. Amines for reducing the pH are also frequently used in corrosion inhibitors or may be added as such to the fuel. Heterocyclic aromatics are generally used as corrosion inhibitors for nonferrous metals.



## 12

Examples of antioxidants or stabilizers are in particular amines, such as para-phenylenediamine, dicyclohexylamine, morpholine or derivatives of these amines. Phenolic antioxidants, such as 2,4-di-tert-butylphenol or 3,5-di-tert-butyl-4-hydroxyphenyl-  
 5 propionic acid and derivatives thereof, are also added to fuels.

The demulsifiers used are usually salts of fatty acids and sulfonic acids.

- 10 Examples of lubricity additives are certain carboxylic acids or fatty acids, alkenylsuccinic esters, bis(hydroxyalkyl) fatty amines, hydroxyacetoamides or castor oil. For example, suitable lubricity additives are described in EP-A-0 780 460, 0 829 527, 0 869 163, 0 605 857, WO 97/45507, 98/30658 and US-A-5,756,435 and  
 15 5,505,867, which are explicitly incorporated by reference. The aforementioned carboxylic acids or fatty acids may be present as monomer and/or dimeric species.

- If required, carrier oils may furthermore be added, the carrier  
 20 oils differing from the compounds of the formula I.

- Examples of useful carrier oils or carrier liquids are mineral carrier oils, synthetic carrier oils and mixtures thereof which are compatible with the above additive or additives and with the  
 25 fuel. Suitable mineral carrier oils are fractions obtained in mineral oil processing, such as kerosene or naphtha, brightstock or mineral oils having a viscosity of SN 500 - 900, as well as aromatic hydrocarbons, paraffinic hydrocarbons and alkoxyalkanols.

- 30 Examples of suitable synthetic carrier oils are polyolefins, (poly)esters, (poly)alkoxylates, and in particular aliphatic polyethers, aliphatic polyetheramines, alkylphenol-initiated polyethers and alkylphenol-initiated polyetheramines. Suitable  
 35 carrier oil systems are described, for example, in DE-A-38 38 918, DE-A-38 26 608, DE-A-41 42 241, DE-A-43 09 074, US-A-4 877 416 and EP-A-0 452 328. Examples of particularly suitable synthetic carrier oils are alcohol-initiated polyethers having from about 20 to 25 C<sub>3</sub>-C<sub>6</sub>-alkylene oxide units, for example  
 40 selected from propylene oxide units, n-butylene oxide units and isobutylene oxide units or mixtures thereof.

- Examples of suitable additive combinations for fuels are combinations of at least one propoxilate as defined in formula I  
 45 above, at least one detergent additive as defined, for example, in formula II above, at least one lubricity additive as defined

above and/or, if required, at least one corrosion inhibitor as defined above.

The present invention furthermore relates to fuel additive  
5 mixtures which are preferably present in the form of additive concentrates and, as intake valve cleaner components, contain at least one propoxylate additive of the formula I according to the above definition, in particular an alkanol propoxylate of the above formula I, if required in combination with at least one  
10 polyalkylamine of the formula II according to the above definition and, if required, at least one further other fuel additive. According to a preferred embodiment, the novel fuel additive mixtures contain propoxylate and polyalkylamine in a molar ratio stated above for the novel fuel compositions.

15 The present invention furthermore relates to the use of at least one propoxylate of the above formula I, if required in combination with at least one detergent additive as defined above, in particular at least one polyalkylamine of the above  
20 formula II, as an intake valve cleaner additive for fuel compositions for internal combustion engines.

The examples which follow illustrate the invention in more detail.

25

#### Examples

Example 1: Engine test for testing the action as intake system cleaner

30

The engine tests were carried out in a 1.2 l Opel Kadett engine according to CEC F/04/A/87. Fuel used: unleaded European premium grade.

35 The additives used were prepared by the following general method.

A dewatered mixture of the alcohol used as initiator and KOH is initially taken in a pressure-resistant vessel, the amount of KOH used being from about 0.01 to 1, preferably from 0.05 to 0.5, %  
40 by weight of the expected total weight of the reaction product. The apparatus is then flushed several times with nitrogen and is heated to about 135°C and the propylene oxide is then metered in while stirring at a constant temperature and at a pressure of from 3 to 30 bar via a dip tube or onto the surface. After  
45 metering is complete, the reaction mixture is further stirred until the pressure remains constant. After the reactor content has been cooled to about 50°C, the reaction vessel is let down and

## 14

is flushed with nitrogen. The product is freed from volatile components, advantageously under reduced pressure, and, if necessary, clarified by filtration. Before the filtration, it is advantageously removed from the catalyst by methods known to a person skilled in the art, for example treatment with ion exchanger, precipitation or absorption, etc.

Table 1

10	Additive	Dose [mg/kg]	Intake valve deposits [mg] <sup>1)</sup>				
			Valves	1	2	3	4
15	Tridecanol x 10 Propylene oxide	400		13 (277)	2 (175)	11 (183)	58 (337)
	Tridecanol x 15 Propylene oxide	400		4 (277)	0 (175)	1 (183)	0 (337)
	Tridecanol x 20 Propylene oxide	400		17 (277)	0 (175)	0 (183)	22 (337)
20	Tridecanol x 25 Propylene oxide	400		144 (514)	34 (303)	305 (300)	41 (519)
	Tridecanol x 30 Propylene oxide	400		160 (514)	2 (303)	28 (300)	86 (519)

25 <sup>1)</sup> Values in brackets: Deposits without addition of additives; the different values are due to differences in the unleaded European premium grade used

Example 2: Cooperation of tridecanol propoxylate and  
30 polyisobutenamine

The following test results (engine: Mercedes Benz M 102 E) show that a maximum effect is also achieved with a tridecanol propoxylate with 15 mol of propylene oxide. In a  
35 polyisobutenamine-containing fuel additive package (PIBA content 25% by weight) the carrier oil component was varied in the manner stated.

40

45

Table 2

5	Additive	Dose* [mg/kg]	Intake valve deposits [mg]*				
			Valve	1	2	3	4
	Starting value	-		283	132	232	290
	Tridecanol x 15 propylene oxide	500		7	10	89	19
10	Tridecanol x 25 propylene oxide	500		59	97	39	40

\* Dose of a formulation comprising propoxylate and PIBA in a weight ratio of about 1:1; total amount of PIBA + propoxylate in the formulation is 50% by weight.

15

### Example 3: Compatibility investigation

The following test results show that a tridecanol propoxylate with 15 mol of propylene oxide has optimum compatibility with the components of an additive package (concentrate).

20

In a polyisobutenamine-containing fuel additive package, the carrier oil component was replaced with the novel tridecanol propoxylate with 15 mol of propylene oxide or with a corresponding propoxylate not according to the invention and comprising 25 mol of propylene oxide. The formulation with the novel component was homogeneous whereas phase separation occurred in the comparative formulation when left to stand at 20°C.

25

30 58/cb


35

40

45

We claim:

1. A fuel composition for internal combustion engines,  
 5 comprising a principle amount of a liquid hydrocarbon fuel  
 and an amount, which has a cleaning effect, of at least one  
 propoxylate additive of the formula I

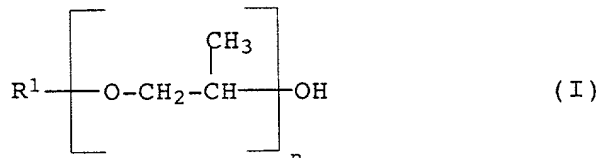

where

n is an integer from 10 to 20 and

R<sup>1</sup> is straight-chain or branched C<sub>8</sub>-C<sub>18</sub>-alkyl or  
 C<sub>8</sub>-C<sub>18</sub>-alkenyl.

2. A fuel composition as claimed in claim 1, which contains the  
 25 propoxylate of the formula I in an amount of from about 50 to  
 5000 mg/kg of fuel.

3. A fuel composition for internal combustion engines,  
 containing a principle amount of a liquid hydrocarbon fuel,  
 30 comprising an amount, which has a cleaning effect, of an  
 additive combination comprising

i) at least one propoxylate additive of the formula I as  
 claimed in claim 1;

ii) at least one detergent additive;

if required in combination with at least one lubricity  
 additive.

4. A fuel composition as claimed in claim 3, wherein the  
 40 detergent additive is selected from a polyalkylamine additive  
 of the formula II



where

R<sup>2</sup> is a straight-chain or branched polyalkyl radical having a number average molecular weight of from about 500 to about 5000.

5

5. A fuel composition as claimed in claim 3 or 4, which contains the additives i) and ii) in a total amount of from about 100 to 10000 mg/kg of fuel.
- 10 6. A fuel composition as claimed in any of claims 3 to 5, which contains the additives i) and ii) in a molar ratio of from about 1:10 to about 10:1.
- 15 7. A fuel composition as claimed in any of claims 4 to 6, comprising at least one polyalkylamine additive of the formula II, where R<sup>2</sup> is a radical derived from identical or different C<sub>2</sub>-C<sub>30</sub>-alkenes.
- 20 8. A fuel composition as claimed in any of claims 4 to 7, which contains, as an additive of the formula II, at least one polyisobutenamine having a number average molecular weight of from 800 to 1500.
- 25 9. A fuel composition as claimed in any of the preceding claims, which comprises at least one additive of the formula I, where n is the integer of 15 and R<sup>1</sup> is straight-chain or branched C<sub>13</sub>-alkyl.
- 30 10. A fuel additive mixture which contains, as intake valve cleaner component, at least one propoxylate according to the definition in claim 1, if required in combination with at least one detergent additive and, if required, together with further conventional fuel additives.
- 35 11. A fuel additive mixture as claimed in claim 10, which contains propoxylate and polyalkylamine in a molar ratio of from about 1:10 to 10:1.
- 40 12. A fuel additive mixture as claimed in claim 10 or 11, which contains as a further additive component at least one lubricity additive.
- 45 13. A fuel additive mixture as claimed in any of claims 10 to 12 formulated as a additive concentrate.

18

14. The use of at least one propoxylate according to the definition in claim 1, if required in combination with at least one detergent additive, as an intake valve cleaner additive for fuel compositions for internal combustion engines.

58/cb

10

15

20

25

30

35


40

45

## Abstract

Fuel compositions for internal combustion engines, comprising a principle amount of a liquid hydrocarbon fuel and an amount, which has a cleaning effect, of at least one propoxylate additive of the formula I

10

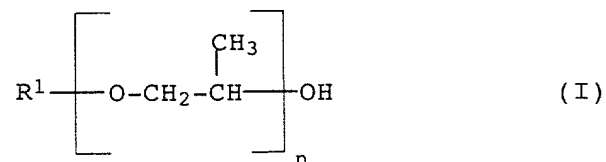

15

where

n is an integer from 10 to 20 and

20  $R^1$  is straight-chain or branched  $C_8$ - $C_{18}$ -alkyl or  $C_8$ - $C_{18}$ -alkenyl, if required in combination with at least one detergent additive, e. g. a polyalkylamine additive of the formula II

25



where

30  $R^2$  is a straight-chain or branched polyalkyl radical having a number average molecular weight of from about 500 to about 5000,

and fuel additive compositions which contain propoxylates of the formula I and, if required, further additives, such as the  
35 aforementioned polyalkylamines of the formula II, as intake valve cleaners.

40

45



# Declaration, Power of Attorney

Page 1 of 3

0050/049183

We (I), the undersigned inventor(s), hereby declare(s) that:

My residence, post office address and citizenship are as stated below next to my name,

We (I) believe that we are (I am) the original, first, and joint (sole) inventor(s) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Fuel composition containing propoxilate

the specification of which

☐ is attached hereto.

☐ was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_

and amended on \_\_\_\_\_.

☒ was filed as PCT international application

Number PCT/EP 99/04818

on July 8, 1999

and was amended under PCT Article 19

on \_\_\_\_\_ (if applicable).

We (I) hereby state that we (I) have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We (I) acknowledge the duty to disclose information known to be material to the patentability of this application as defined in Section 1.56 of Title 37 Code of Federal Regulations.

We (I) hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed. Prior Foreign Application(s)

Application No.	Country	Day/Month/Year	Priority Claimed
19830818.3	Germany	09 July 1998	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

We (I) hereby claim the benefit under Title 35, United States Codes, § 119(e) of any United States provisional application(s) listed below.

\_\_\_\_\_  
(Application Number)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Number)

\_\_\_\_\_  
(Filing Date)

We (I) hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

Application Serial No.

Filing Date

Status (pending, patented,  
abandoned)

_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

And we (I) hereby appoint:

Norman F. Oblon, Registration Number 24, 618;  
Marvin J. Spivak, Registration Number 24, 913;  
Gregory J. Maier, Registration Number 25, 599;  
William E. Beaumont, Registration Number 30, 996;  
Steven B. Kelber, Registration Number 30, 073;  
Jean-Paul Lavalleye, Registration Number 31, 451;  
Timothy R. Schwartz, Registration Number 32, 171;  
Stephen G. Baxter, Registration Number 32, 884;  
Richard L. Treanor, Registration Number 36, 379;  
Robert W. Hahl, Registration Number 33, 893, our (my) attorneys, with full

powers of substitution and revocation, to prosecute this application and to transact all business in the Patent Office connected therewith; and we (I) hereby request that all correspondence regarding this application be sent to the firm of **OBLON, SPIVAK, McCLELLAND, MAIER & NEUSTADT, P. C.**, whose Post Office Address is: Fourth Floor, 1755 Jefferson Davis Highway, Arlington, Virginia 22202.

We (I) declare that all statements made herein of our (my) own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

100 Wolfgang Günther  
NAME OF INVENTOR

Wolfgang Günther  
Signature of Inventor

Date October 19, 2000

Hauptstr.9  
67582 Mettenheim  
Germany DEX  
Citizen of: Germany  
Post Office Address: same as residence

200 Knut Oppenländer  
NAME OF INVENTOR

Knut Oppenländer  
Signature of Inventor

Date October 19, 2000

Otto-Dill-Str.23  
67061 Ludwigshafen  
Germany DEX  
Citizen of: Germany  
Post Office Address: same as residence

100 Harald Schwahn  
NAME OF INVENTOR

Harald Schwahn  
Signature of Inventor

Date October 19, 2000

Schloßstr.68  
69168 Wiesloch  
Germany DEX  
Citizen of: Germany  
Post Office Address: same as residence

400 Irene Trötsch-Schaller  
NAME OF INVENTOR

Irene Trötsch-Schaller  
Signature of Inventor

Date October 19, 2000

Rottwegshohl 11  
67281 Bissersheim  
Germany DEX  
Citizen of: Germany  
Post Office Address: same as residence